

# SB-704 Four-Channel Switchboard Main Station

Analog Partyline Solutions

Linking  
People  
Together



SB-704

## Key Features

- Supports up to 55 beltpacks or 10 speaker stations on four channels
- 10 x 4 assignment switching matrix
- Separate short-circuit protection for each channel
- Dual-action electronic momentary/latching Talk buttons
- Three interruptible IFB channels
- Call signal buttons for each channel
- Global Remote Mic Kill
- Announce output with relay
- Microphone limiting
- Volume controls for each channel
- Visual and audible Tone Alert signaling
- Channel Linking
- External switchable line termination on each channel
- Universal voltage power supply

Clear-Com Encore® is a 2-wire analog partyline system with intuitive plug-and-play design and superior “Clear-Com Sound” audio quality.

## Description

The SB-704 is a 2RU four-channel switchboard main station with programmable front panel buttons, individual channel short-circuit protection, individual channel volume control, a switchboard matrix, and a regulated fail-safe power supply. The SB-704 supports up to 55 beltpacks or 10 speaker stations, or 12 headset stations. The 10 x 4 assignment switching matrix allows up to 10 different groups of stations to be assigned to any one of the four channels.

## Audio Sources and Monitoring

The SB-704 accepts five separate program audio sources: four line-level balanced inputs and one assignable line-level input. The assignable program input accepts a balanced signal and is designed for monitoring external audio. The four balanced program inputs can be used to create individual program feeds on the intercom channels. The SB-704 can monitor intercom activity on one or all four channels with individual volume level controls. Monitoring intercom activity is possible through a headset.

## Talk Selection

The SB-704 has mic pre-amps with limiters and speech-shaping circuits. An individual electronic momentary/latching Talk button is available for each channel. Illuminated dual-action Talk buttons light an LED dimly when latched: blue-color while in standby, amber-color when latched. The latching feature can be disabled. The channels can be accessed separately or simultaneously without tying them together. A selector switch toggles between the headset or microphone. The Talk buttons can also be controlled with a footswitch.

## Announce Output

For paging, the SB-704 provides a balanced, line-level output signal to a ¼-inch TRS connector on the rear panel. The front panel Announce button activates the output and the Announce relay. The relay circuit, on a separate ¼-inch TRS connector, is typically used to mute monitors.

## Call Signaling

The SB-704 has individual Call buttons with visual call signaling for each channel on the partyline. The visual signal will flash brightly and will emit an audible signal if the remote station operator holds the Call button for more than 2 seconds. The call signaling feature can be programmed to the Talk buttons.

# SB-704 Four-Channel Switchboard Main Station

Analog Partyline Solutions

## Remote Mic Kill (RMK)

The SB-704 has a global Remote Mic Kill button that will turn on the microphone talk circuits of all beltacks on the system, eliminating extraneous noise from the open headset microphones.

## Program Input and Interrupt (IFB)

The SB-704 accepts a line-level external program input for monitoring in the headset and/or mixing with intercom audio on up to three of the four channels. When Interrupt is selected, the program signal is interrupted when the Talk button is pressed.

## Configuration Panel

The SB-704 has a removable front panel for easy access to the station's configuration switches and trim pots. Clearly labeled and easy to adjust, these controls allow the SB-704 to be configured quickly. When configuration is complete, the front panel can be reattached so it shows only the needed controls.

## Power

The SB-702 has a visual indication of power supply conditions. In the event of a short circuit or current overload on a channel, that channel will shut down while the other one continues to operate. As soon as the fault condition is removed, the auto-reset circuitry will restore power to that channel, even under full-load conditions.

## Technical Specifications

dBu is an absolute measurement. 0 dBu is referenced to 0.775 volts RMS

### Station Capacity

Up to 55 RS-701 beltacks or 10 speaker stations or 12 headset stations distributed over all channels

### Panel Microphone Input

Input Type: Electret  
Input Impedance:  $\geq 2K$   
Mic Limiter Threshold: 0dBu  $\pm 3dB$   
Mic Limiter Range:  $\geq 15dB$

### Headset Microphone Input

Input Type: Dynamic  
Input Impedance:  $\geq 1K$   
Mic Limiter Threshold: 0dBu  $\pm 3dB$   
Mic Limiter Range:  $\geq 15dB$

### Program Line Input

Maximum Level before Clipping:  $\geq 20dBu$   
Input Impedance:  $\geq 5K$

### Headset Output

Load Impedance:  $\geq 8$  Output  
Impedance:  $\leq 25$   
Output Limiter Threshold: +5dBu  $\pm 3dB$   
Maximum Output Level before Distortion:  $\geq 17dBu$

### Speaker Output

Load Impedance:  $\geq 4$   
Max Output Level before 1% Distortion: 20dBu  $\pm 2dBu$

### Party Line Output

Output Noise:  $< -74dBu$   
Output Impedance:  $> 10K$

### Partyline Input

Crosstalk:  $< -60dB$   
Max level before Clipping:  $\geq 12dBu$   
Sidetone Null Capability:  $> 25dB$

### Stage Announce/Balanced Line Out

Type: Balanced  
Output Impedance:  $\geq 200$   
Load Impedance:  $\geq 600$

### IFB/Hot Mic

Type: Unbalanced  
Output Impedance: 150  
Impedance:  $\geq 600$

### Frequency Response

Panel Mic - Partyline: 600 - 10kHz  $\pm 3dB$   
Headset Mic - Partyline: 200 - 12kHz  $\pm 3dB$   
Headset Mic - Line Out: 200 - 12kHz  $\pm 3dB$   
Program Input - Partyline: 100 - 17kHz  $\pm 3dB$   
Program Input - Headset Out: 200 - 10kHz  $\pm 3dB$   
Program Input - Speaker Out: 300 - 10kHz  $\pm 3dB$   
Partyline - Headset Out: 200 - 10kHz  $\pm 3dB$   
Partyline - Speaker Out: 300 - 10kHz  $\pm 3dB$

### Max Distortion

Panel Mic - Partyline:  $\leq 0.5\%$   
Headset Mic - Partyline:  $\leq 0.5\%$   
Headset Mic - Line Out:  $\leq 0.5\%$   
Program Input - Partyline:  $\leq 0.2\%$   
Program Input - Headset Out:  $\leq 0.2\%$   
Program Input - Speaker Out:  $\leq 0.5\%$   
Partyline - Headset Out:  $\leq 0.2\%$   
Partyline - Speaker Out:  $\leq 0.5\%$

### Noise

Panel Mic - Partyline:  $< -65dBu$   
Headset Mic - Partyline:  $< -70dBu$   
Headset Mic - Line Out:  $< -55dBu$   
Program Input - Partyline:  $< -85dBu$

Program Input - Headset Out:  $< -60dBu$   
Program Input - Speaker Out:  $< -60dBu$   
Partyline - Headset Out:  $< -50dBu$   
Partyline - Speaker Out:  $< -50dBu$

### Max Gain

Panel Mic - Partyline:  $\geq 37dB$   
Headset Mic - Partyline: 41dB  $\pm 2dB$   
Headset Mic - Hot Mic Out: 55dB  $\pm 3dB$   
Headset Mic - Announce Out: 55dB  $\pm 3dB$   
Program Input - Partyline:  $\geq -16dB$   
Program Input - Headset Out:  $\geq 18dB$   
Program Input - Speaker Out:  $\geq 24dB$   
Partyline - Headset Out:  $\geq 34dB$   
Partyline - Speaker Out:  $\geq 40dB$

### Min Gain

Panel Mic - Partyline:  $\leq 25dB$

### Mains Power

Input Voltage Range: 100 - 240V AC  
Input Frequency Range: 50 - 60Hz  
Input Power:  $\leq 60$   
VAC Output Voltage: 30V DC  $\pm 0.5V$   
Output Current per Channel (Continuous): 1.2A  
Output Current per Channel (Peak): 2A (Do not exceed the 1.2A rating for more than 2 seconds per 1 minute period)  
Short Circuit Recovery Time (1st short):  $\leq 0.5$  sec  
Short Circuit Recovery Time  $\geq 20$  shorts in 20sec):  $\leq 20$  sec

### Environmental

32° - 122°F (0° - 50°C)

### Dimensions

3.5 x 19 x 10.5in (HxWxD)  
(88 x 483 x 267mm)


### Weight

10.9lbs (4.9kg)

# SB-704 Four-Channel Switchboard Main Station

Analog Partyline Solutions

## SB-704 Front Panel

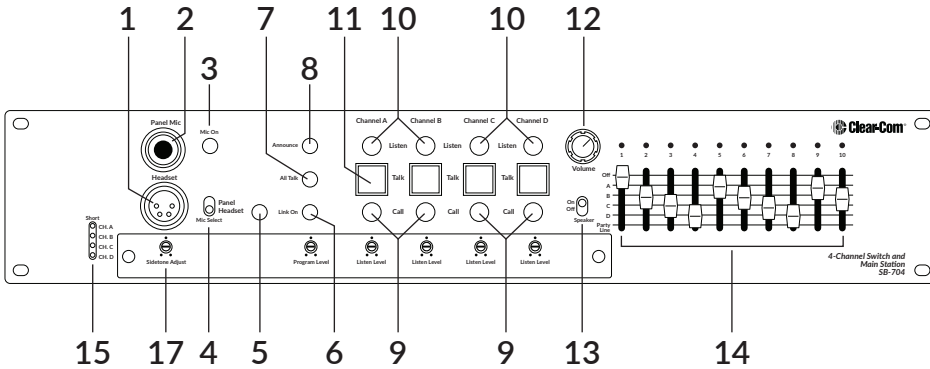


## Legend

### Front Panel

1. XLR-4M Headset connector
2. Mic connector
3. Mic On switch
4. Mic Select switch
5. Remote Mic Kill
6. Link button
7. All Talk button
8. Announce button
9. Call button
10. Listen button
11. Talk button
12. Volume control
13. Speaker On/Off switch
14. Assignment Switching Matrix
15. Short Indicator
16. Panel Mic Gain
17. Sidetone Adjust

## SB-704 Back Panel

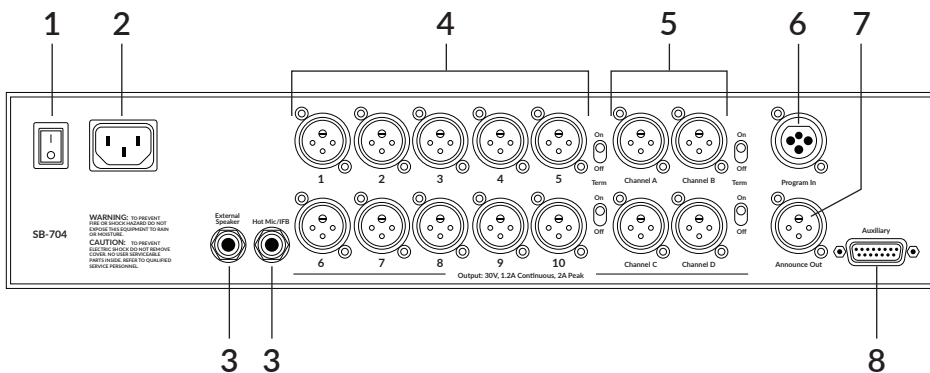

### Back Panel

1. Power On/Off switch
2. Power connector
3. Hot Mic/IFB Output
4. Channel Intercom connectors
5. Channel Termination switches
6. Program In
7. Announce Out
8. AUX connector

## Order Code

SB-704



[www.clearcom.com/encore-knowledge-center/](http://www.clearcom.com/encore-knowledge-center/)



[www.clearcom.com](http://www.clearcom.com)

© 2022 Clear-Com LLC. All rights reserved.  
Clear-Com Encore, Clear-Com, and the Clear-Com logo are registered trademarks of Clear-Com LLC.

**Notice About Specifications** | While Clear-Com makes every attempt to maintain the accuracy of the information contained in its documentation, that information is subject to change without notice. Performance specifications included in this document are design-center specifications and are included for customer guidance and to facilitate system installation. Actual operating performance may vary.

**WARNING:** Cancer and Reproductive Harm - [www.P65Warnings.CA.Gov](http://www.P65Warnings.CA.Gov)

Rev: Feb./2022